
















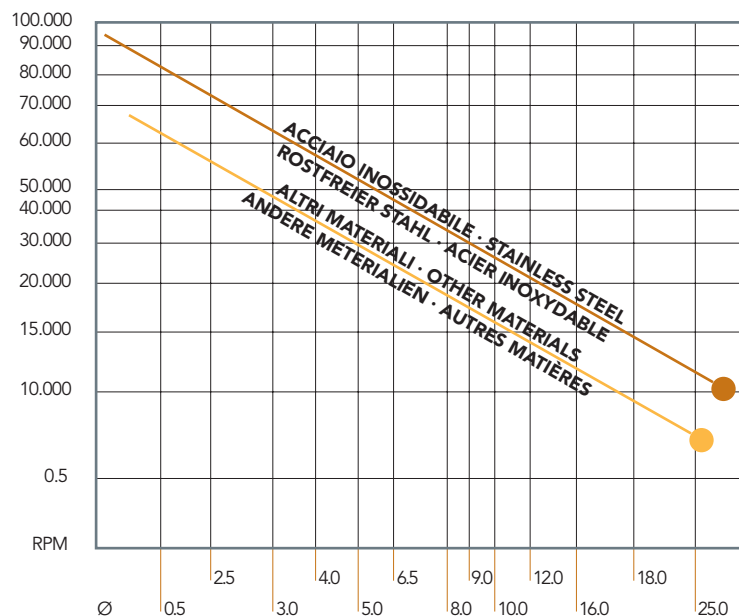

















STOCK	
●	stock standard
○	non stock standard · no stock standard · nicht Stock standard · non stock standard
△	a richiesta · on request · auf Verlangen · sur demande

TIPO DI TAGLIO · CUT TYPE · SCHNEIDETYP · TYPE DE COUPE			
<b>M</b>	DOPPIO TAGLIO DOUBLE CUT 2 SCHNEIDEN COUPE DOUBLE	ottima asportazione, buona finitura, trucioli piccoli good stock removal, good finishing, small chips ausgezeichnete Abtragung, gute Zurichtung, kleine Späne dégrossissage fort, bonne finition, copeaux petits	
<b>MPC</b>	TAGLIO PIANO PLAIN CUT FLACHSCHNEIDE COUPE PLANE	buona asportazione, ottima finitura, trucioli lunghi good stock removal, good finishing, long chips gute Abtragung, ausgezeichnete Zurichtung, lange Späne dégrossissage hoyen, finition optimal, copeaux longs	
<b>MDC</b>	TAGLIO DIAMANTE DIAMOND CUT DIAMANT SCHNEIDE COUPE DIAMANT	per acciai duri, ottima asportazione, buona finitura, forma polvere for hardened steel, good stock removal, good finishing, generates powder für Hartstahl, ausgezeichnete Zurichtung, erzeugt Staub pour aciers durs, dégrossissage fort, bonne finition, il forme de poussière	
<b>MNF</b>	ALUCUT ALUCUT ALUCUT ALUCUT	Per leghe leggere For light alloy Für weiche Werkstoffe pour alliages légers	

**PER L'USO DELLE LIME ROTATIVE E' OBBLIGATORIO INDOSSARE OCCHIALI PROTETTIVI**  
**ALWAYS WEAR GOGGLES WHEN USING THE ROTARY BURS**  
**TRAGEN SIE IMMER DIE SCHUTZBRILLE WENN SIE DIE FRÄSER BENUTZEN**  
**TOUJOURS PORTER LES LUNETTES DE SECURITÉ EN UTILISANT LES LIMES ROTATIVES**

TABELLA VELOCITÀ · SPEED TABLE · GESCHWINDIGKEITSTABELLE · TABLEAU DE VITESSE



CODICE · ITEM NO. ARTIKEL NR. · RÉFÉRENCE	PAGINA · PAGE SEITE · PAGE	GAMBO Ø3mm · SHANK Ø3mm SCHAFT Ø3mm · QUEUE Ø3mm	GAMBO Ø6mm · SHANK Ø6mm SCHAFT Ø6mm · QUEUE Ø6mm
SA	198		
SB	198		
SC	199		
SD	199		
SE	200		
SF	200		
SG	201		
SH	201		
SJ	202		
SK	202		
SL	202		
SM	203		
SN	203		
A15FW	203	<b>kit 15 pcs. MPC</b>	
A16FW	203	<b>kit 15 pcs. DC</b>	
BUR10	203	<b>kit 10 pcs. M</b>	

🇮🇹 LIME ROTATIVE IN METALLO DURO 
 🇬🇧 SOLID CARBIDE ROTARY BURRS  
🇩🇪 FRÄSSTIFTE AUS HARTMETAL 
 🇫🇷 LIMES ROTATIVES CARBURE


Item No.	D	d	l	L	M	MPC	MNF
					Stock	Stock	Stock
SA41	1.5	3	6	38	●	●	
SA41 - L2	1.5	3	6	50	○	○	
SA41 - L3	1.5	3	6	75	○	○	
SA42	2.5	3	11	38	●	●	
SA42 - L2	2.5	3	11	50	○	○	
SA42 - L3	2.5	3	11	75	○	○	
SA43	3	3	14	38	●	●	
SA43 - L2	3	3	14	50	○	○	
SA43 - L3	3	3	14	75	○	○	
SA52	4	3	12.7	38	●	●	
SA53	5	3	12.7	38	○	●	
SA51	6.3	3	12.7	50	●	●	
SA11	3	6	12	56	●	○	
SA13	4	6	16	50	●	○	
SA14	5	6	16	50	●	○	
SA1	6	6	16	50	●	○	●
SA1 - L	6	6	25	50	○	○	
SA2	8	6	19	63	●	○	
SA3	9.5	6	19	63	●	○	●
SA3 - L	9.5	6	25	69	○	○	
SA4	11	6	25	69	●	○	
SA5	12.7	6	25	69	●	○	●
SA6	16	6	25	69	●	○	○
SA7	19	6	25	69	●	○	○
SA9	25	6	25	69	●	○	

MDC a richiesta · on request · auf Verlangen · sur demande

Item No.	D	d	l	L	M	MPC	MNF
					Stock	Stock	Stock
SB41	1.5	3	6	38	●	●	
SB41 - L2	1.5	3	6	50	○	○	
SB41 - L3	1.5	3	6	75	○	○	
SB42	2.5	3	11	38	○	●	
SB42 - L2	2.5	3	11	50	○	○	
SB42 - L3	2.5	3	11	75	○	○	
SB43	3	3	14	38	●	●	
SB43 - L2	3	3	14	50	○	○	
SB43 - L3	3	3	14	75	○	○	
SB51	6.3	3	4.7	43	●	●	
SB11	3	6	12	56	●	○	
SB13	4	6	16	50	●	○	
SB14	5	6	16	50	●	○	
SB1	6	6	16	50	●	○	○
SB1 - L	6	6	25	50	○	○	
SB2	8	6	19	63	●	○	
SB3	9.5	6	19	63	●	○	○
SB3 - L	9.5	6	25	69	○	○	
SB4	11	6	25	69	●	○	
SB5	12.7	6	25	69	●	○	○
SB6	16	6	25	69	●	○	○
SB7	19	6	25	69	●	○	○
SB9	25	6	25	69	●	○	


MDC a richiesta · on request · auf Verlangen · sur demande

 **LIME ROTATIVE IN METALLO DURO**
 **SOLID CARBIDE ROTARY BURRS**  
 **FRÄSSTIFTE AUS HARTMETAL**
 **LIMES ROTATIVES CARBURE**




Item No.	D	d	l	L	M	MPC	MNF
					Stock	Stock	Stock
SC41	2.5	3	11	38	●	●	
SC42	3	3	14	38	●	●	
SC42 - L2	3	3	14	50	○	○	
SC42 - L3	3	3	14	75	○	○	
SC51	6.3	3	12.7	50	○	●	
SC52	4	3	12.7	38	●	●	
SC53	5	3	12.7	38	●	●	
SC11	3	6	12	56	●	○	
SC13	4	6	16	50	●	○	
SC14	5	6	16	50	●	○	
SC1	6	6	16	50	●	○	●
SC1 - L	6	6	25	50	○	○	
SC2	8	6	19	63	●	○	
SC3	9.5	6	19	63	●	○	●
SC3 - L	9.5	6	25	69	○	○	
SC4	11	6	25	69	●	○	
SC5	12.7	6	25	69	●	○	●
SC6	16	6	25	69	●	○	○
SC7	19	6	25	69	●	○	○
SC9	25	6	25	69	●	○	

MDC a richiesta · on request · auf Verlangen · sur demande



Item No.	D	d	l	L	M	MPC	MNF
					Stock	Stock	Stock
SD41	2.5	3	2.3	38	●	●	
SD42	3	3	2.8	38	●	●	
SD42 - L2	3	3	2.8	50	○	○	
SD42 - L3	3	3	2.8	75	○	○	
SD51	6.3	3	5	44	●	●	
SD53	5	3	4	38	●	●	
SD11	3	6	2.8	50	●	○	
SD14	5	6	4	50	●	○	
SD1	6	6	5	50	●	○	○
SD2	8	6	6.4	50	●	○	
SD3	9.5	6	8	52	●	○	○
SD4	11	6	9.5	54	●	○	
SD5	12.7	6	11	55	●	○	○
SD6	16	6	14	58	●	○	○
SD7	19	6	16	62	●	○	○
SD9	25	6	23	68	●	○	

MDC a richiesta · on request · auf Verlangen · sur demande

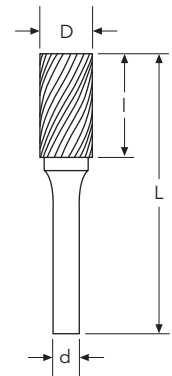


🇮🇹 LIME ROTATIVE IN METALLO DURO 🇬🇧 SOLID CARBIDE ROTARY BURRS

🇩🇪 FRÄSSTIFTE AUS HARTMETAL 🇫🇷 LIMES ROTATIVES CARBURE

Item No.	D	d	l	L	M	MPC	MNF
					Stock	Stock	Stock
SE41	3	3	5.5	38	●	●	
SE41 - L2	3	3	5.5	50	○	●	
SE41 - L3	3	3	5.5	75	○	●	
SE51	6.3	3	9.5	47	●	●	
SE53	5	3	7.1	38	●	●	
SE1	6	6	9.5	50	●	○	
SE3	9.5	6	16	60	●	○	○
SE5	12.7	6	22	66	●	○	○
SE6	16	6	25	69	●	○	○
SE7	19	6	25	69	●	○	○


MDC a richiesta · on request · auf Verlangen · sur demande

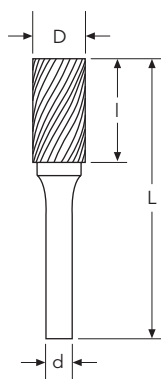

Item No.	D	d	l	L	M	MPC	MNF
					Stock	Stock	Stock
SF41	3	3	6	38	○	●	
SF42	3	3	12.7	38	●	●	
SF42 - L2	3	3	12.7	50	○	○	
SF42 - L3	3	3	12.7	75	○	○	
SF51	6.3	3	12.7	50	●	●	
SF53	5	3	12.7	38	●	●	
SF11	3	6	12.7	56	●	○	
SF1	6	6	16	50	●	○	○
SF3	9.5	6	19	63	●	○	○
SF4	11	6	25	69	●	○	
SF13	12.7	6	19	63	○	○	
SF5	12.7	6	25	69	●	○	○
SF6	16	6	25	69	●	○	○
SF7	19	6	25	69	●	○	○
SF14	19	6	32	76	○	○	○
SF15	19	6	38	82	○	○	


MDC a richiesta · on request · auf Verlangen · sur demande

 LIME ROTATIVE IN METALLO DURO 
  SOLID CARBIDE ROTARY BURRS  
 FRÄSSTIFTE AUS HARTMETAL 
  LIMES ROTATIVES CARBURE




Item No.	D	d	l	L	M	MPC	MNF
					Stock	Stock	Stock
SG41	3	3	6	38	●	●	
SG43	3	3	9.5	38	●	●	
SG44	3	3	12.7	38	●	●	
SG44 - L2	3	3	12.7	50	○	○	
SG44 - L3	3	3	12.7	75	○	●	
SG51	6.3	3	12.7	50	●	●	
SG53	5	3	12.7	38	●	●	
SG1	6	6	16	50	●	○	
SG2	8	6	19	63	●	○	
SG3	9.5	6	19	63	●	○	
SG13	12.7	6	19	63	○	○	
SG5	12.7	6	25	69	●	○	
SG6	16	6	25	69	●	○	
SG7	19	6	25	69	●	○	
SG15	19	6	38	82	○	○	

MDC a richiesta · on request · auf Verlangen · sur demande




Item No.	D	d	l	L	M	MPC	MNF
					Stock	Stock	Stock
SH41	3	3	6.3	38	●	●	
SH41 - L2	3	3	6.3	50	○	○	
SH41 - L3	3	3	6.3	75	○	○	
SH53	5	3	9.5	38	○	●	
SH2	8	6	19	63	●	○	
SH5	12.7	6	32	76	●	○	
SH6	16	6	36	80	●	○	
SH7	19	6	41	85	●	○	

MDC a richiesta · on request · auf Verlangen · sur demande

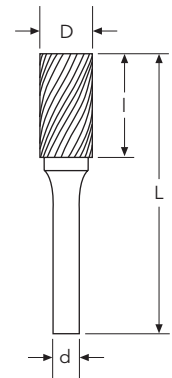


LIME ROTATIVE IN METALLO DURO 
 SOLID CARBIDE ROTARY BURRS  
 FRÄSSTIFTE AUS HARTMETAL 
 LIMES ROTATIVES CARBURE





Item No.	D	d	l	L	$\alpha$	M	MPC	MNF
						Stock	Stock	Stock
<b>SJ42</b>	3	3	2.5	38	60°	○	●	
<b>SJ1</b>	6	6	4	50	60°	●	○	
<b>SJ3</b>	9.5	6	8	55	60°	●	○	
<b>SJ5</b>	12.7	6	11	58	60°	●	○	
<b>SJ6</b>	16	6	13.5	61	60°	●	○	
<b>SJ7</b>	19	6	16.5	65	60°	○	○	
<b>SJ9</b>	25	6	21.5	68	60°	○	○	

MDC a richiesta · on request · auf Verlangen · sur demande



Item No.	D	d	l	L	$\alpha$	M	MPC	MNF
						Stock	Stock	Stock
<b>SK42</b>	3	3	1.5	38	90°	○	●	
<b>SK1</b>	6	6	3	50	90°	●	○	
<b>SK3</b>	9.5	6	4.7	52	90°	●	○	
<b>SK5</b>	12.7	6	6.3	54	90°	●	○	
<b>SK6</b>	16	6	8	57	90°	●	○	
<b>SK7</b>	19	6	9.5	58	90°	○	○	
<b>SK9</b>	25	6	12.7	60	90°	○	○	

MDC a richiesta · on request · auf Verlangen · sur demande

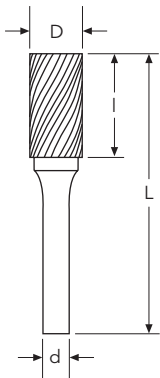




Item No.	D	d	l	L	$\alpha$	M	MPC	MNF
						Stock	Stock	Stock
<b>SL41</b>	3	3	9.5	38	8°	●	●	
<b>SL42</b>	3	3	12.7	38	8°	●	●	
<b>SL42 - L2</b>	3	3	12.7	50	8°	○	○	
<b>SL42 - L3</b>	3	3	12.7	75	8°	○	○	
<b>SL53</b>	5	3	12.7	38	14°	○	●	
<b>SL1</b>	6	6	16	50	14°	●	○	
<b>SL2</b>	8	6	22	69	14°	●	○	
<b>SL3</b>	9.5	6	27	74	14°	●	○	○
<b>SL4</b>	12.7	6	28	76	14°	●	○	●
<b>SL5</b>	16	6	30	77	14°	●	○	○
<b>SL7</b>	19	6	38	85	14°	○	○	

MDC a richiesta · on request · auf Verlangen · sur demande





LIME ROTATIVE IN METALLO DURO 
 SOLID CARBIDE ROTARY BURRS  
 FRÄSSTIFTE AUS HARTMETAL 
 LIMES ROTATIVES CARBURE


Item No.	D	d	l	L	$\alpha$	M	MPC	MNF
						Stock	Stock	Stock
SM41	3	3	8.9	38	12°	●	●	
SM42	3	3	11	38	14°	●	●	
SM42 - L2	3	3	11	50	14°	○	○	
SM42 - L3	3	3	11	75	14°	○	○	
SM43	3	3	16	38	7°	●	●	
SM51	6.3	3	12.7	53	22°	●	●	
SM53	5	3	12.7	38	16°	○	●	
SM1	6	6	12.7	50	22°	●	○	
SM2	6	6	19	50	14°	●	○	
SM3	6	6	25	50	10°	●	○	
SM4	9.5	6	16	63	28°	●	○	
SM5	12.7	6	22	69	28°	●	○	
SM6	16	6	25	73	31°	●	○	

MDC a richiesta · on request · auf Verlangen · sur demande

Item No.	D	d	l	L	$\alpha$	M	MPC	MNF
						Stock	Stock	Stock
SN41	2.5	3	3	38	10°	●	●	
SN42	3	3	4	38	10°	●	●	
SN51	6.3	3	6	44	10°	○	●	
SN53	5	3	6.3	38	10°	○	●	
SN1	6	6	8	50	10°	●	○	
SN2	9.5	6	9.5	53	13°	●	○	
SN4	12.7	6	12.7	57	28°	●	○	
SN6	16	6	19	63	18°	●	○	
SN7	19	6	16	70	30°	○	○	


MDC a richiesta · on request · auf Verlangen · sur demande

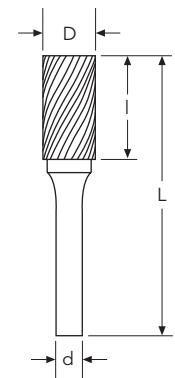

BUR10



A15FW / A16W



DESCRIZIONE · DESCRIPTION · EZEICHUNG · DESCRIPTION	CODICE · ITEM NO. ARTIKEL NR. · RÉFÉRENCE
<b>kit 15pcs. MPC</b> - gambo · shank · Schaft · queue Ø3mm SA41 · SA42 · SA43 · SA52 · SB43 · SC42 · SD41 · SD42 · SD53 · SE41 · SG43 · SL42 · SM42 · SM43 · SN42	A15FW
<b>kit 15pcs. M</b> - gambo · shank · Schaft · queue Ø3mm SA41 · SA42 · SA43 · SA52 · SB43 · SC42 · SD41 · SD42 · SD53 · SE41 · SG43 · SL42 · SM42 · SM43 · SN42	A16FW
<b>kit 10pcs. M</b> - gambo · shank · Schaft · queue Ø6mm SA1 · SB1 · SC1 · SD1 · SE1 · SF1 · SG1 · SL1 · SM1 · SN1	BUR10